


**Description:** Polished Chrome Cooker Switch with Socket (White Insert/Polished Chrome Switch)

**Part Number:** TC229

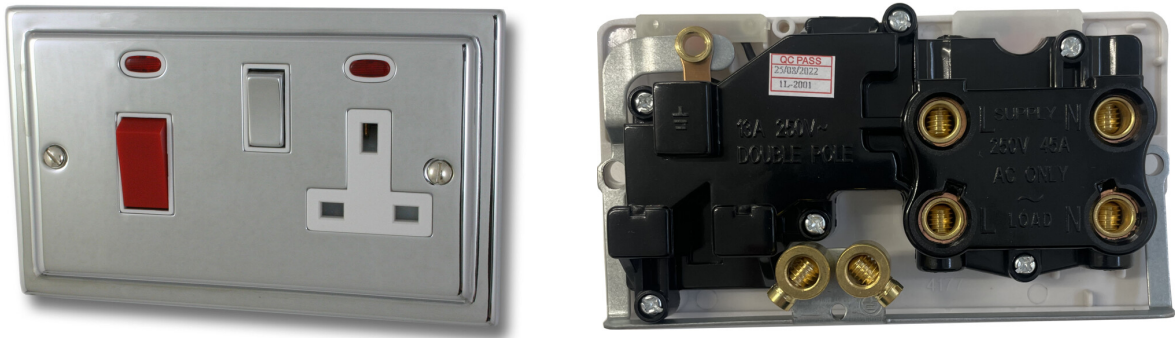

Information

|                         |                                                                                |
|-------------------------|--------------------------------------------------------------------------------|
| Plate Dimensions (mm)   | 154 (W) x 94 (H) x 8 (D)                                                       |
| Insert Material         | Polycarbonate                                                                  |
| Earth Strap             | Mild Steel                                                                     |
| Operating Voltage(AC)   | 250V @ 50Hz                                                                    |
| Termination Type        | Screw                                                                          |
| Warranty                | 10 years                                                                       |
| Product Class 1         | Must be earthed                                                                |
| Maintenance             | Clean with a soft cloth only. Do not use a cleaning agent of any description.  |
| Please Note             | Do not use masking tape on this product.                                       |
| Style                   | Stepped Profile                                                                |
| Plate Material          | Chrome Plated Solid Brass, Hand-finished, Lacquered                            |
| Switch Material         | Metal                                                                          |
| Required back box depth | 47mm                                                                           |
| Load Rating             | 45A                                                                            |
| Switch type             | Double pole                                                                    |
| Terminal Capacity       | 4x 4.0mm² ,3x 6.0mm², 1x 16.0mm²(L&N) / 3x 2.5mm² ,2x 4.0mm², 1x 6.0mm²(EARTH) |
| Standards               | BS EN 60669-1, BS 4177(sockets)                                                |
| IP Rating               | IP2XD                                                                          |